
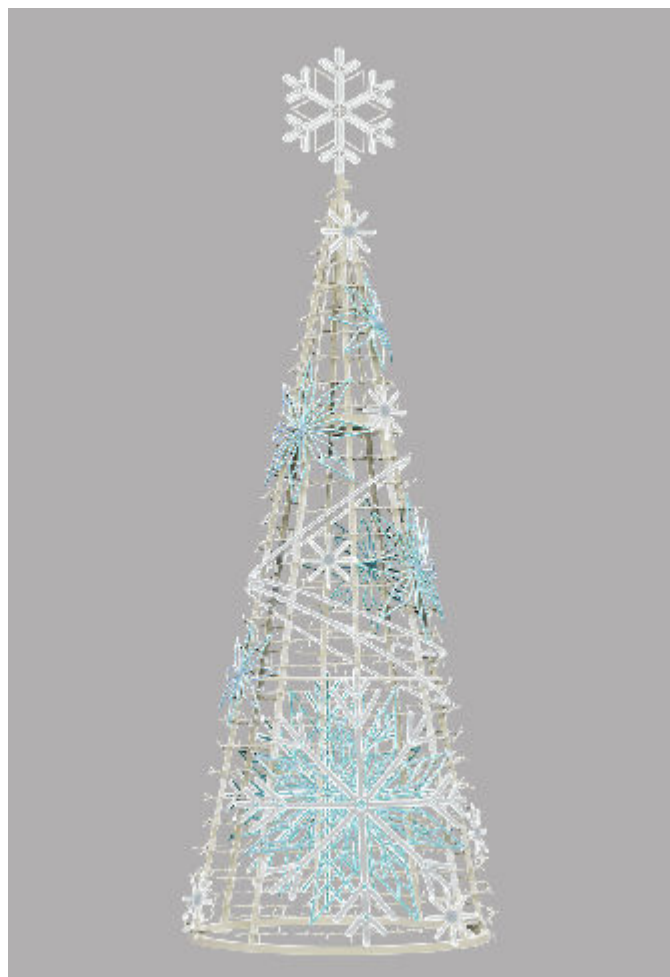



MOUNTING INSTRUCTION


DS-11-FCST

Mechanical part only
Refer to KNOT Mounting instruction from Blachere-Illumination for
assembly details and procedures

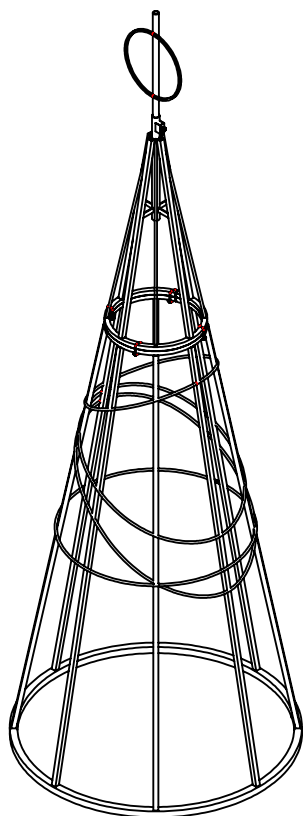


	Celeste			
	DS-11-FCST	Mounting instruction		
	T. Ortega	18/09/2023	1:20	1/3


MOUNTING PARTS :




Tip

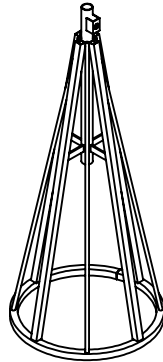


Higher part

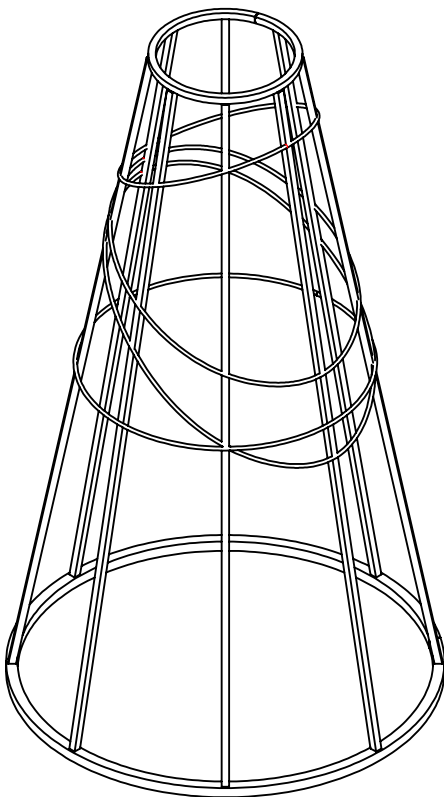


Lower part



U-Bolt clamp

	Celeste			
	DS-11-FCST	Mounting instruction		
	T. Ortega	18/09/2023	1:20	2/3

- 1- Install the base and assemble the higher part by bolting it with clamps.
- 2- Sleeve the crown and block it with the pressure.
- 3- Place the required ballast weight*, as concrete block or equivalent, placed at the center of the tree and attached to its top with connection wires.

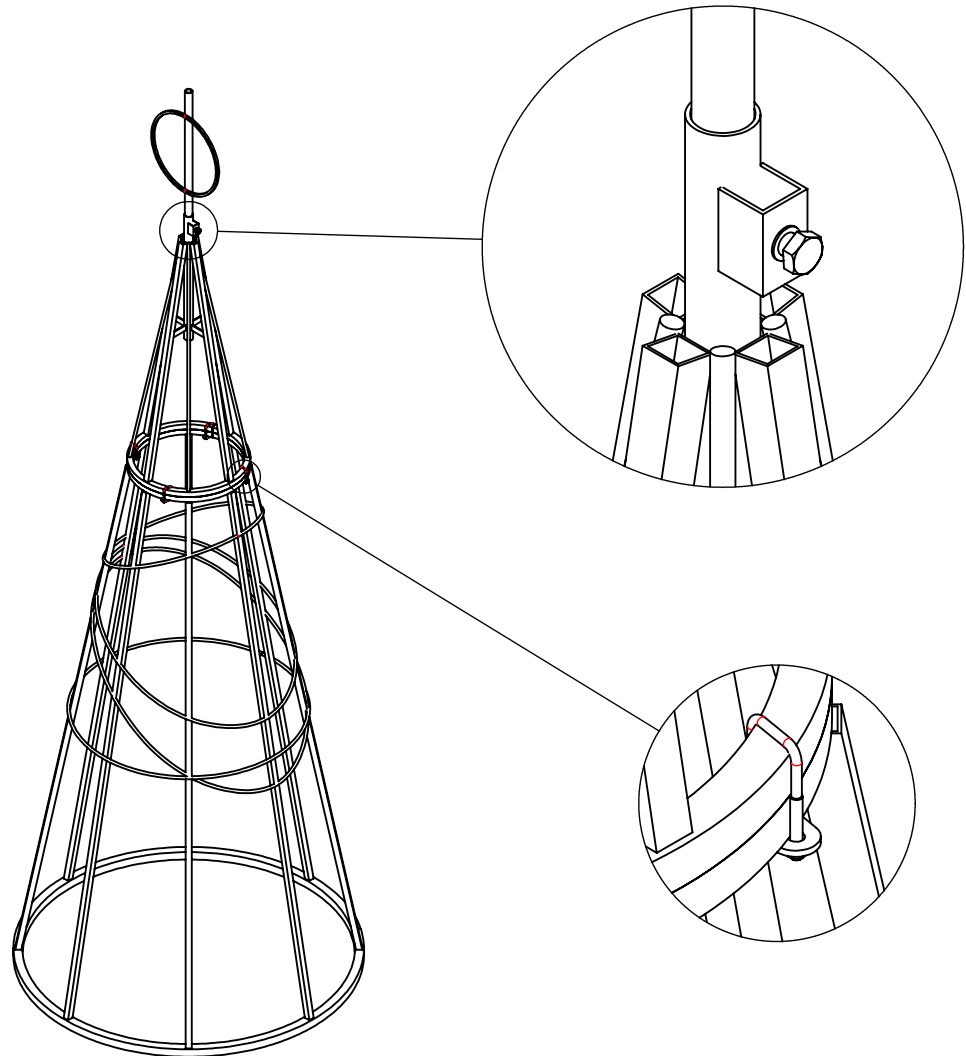

*** Required Ballast Weight :**

The ballast weight depends on the geographic location and roughness of the terrain :


Zone 3 Roughness IIIb : **75 Kg**

Zone 3 Roughness 0 : **175 Kg**

WARNING : Weight specified only for the given geographic wind zone and terrain roughness.

High exposed zone may require higher ballast weight.

Consult Blachere-Illumination if any doubts on geographic wind zone and terrain roughness.

	Celeste			
	DS-11-FCST	Mounting instruction		
	T. Ortega	18/09/2023	1:25	3/3