



DS-14-EGWT


Elie Golden Walk Thru

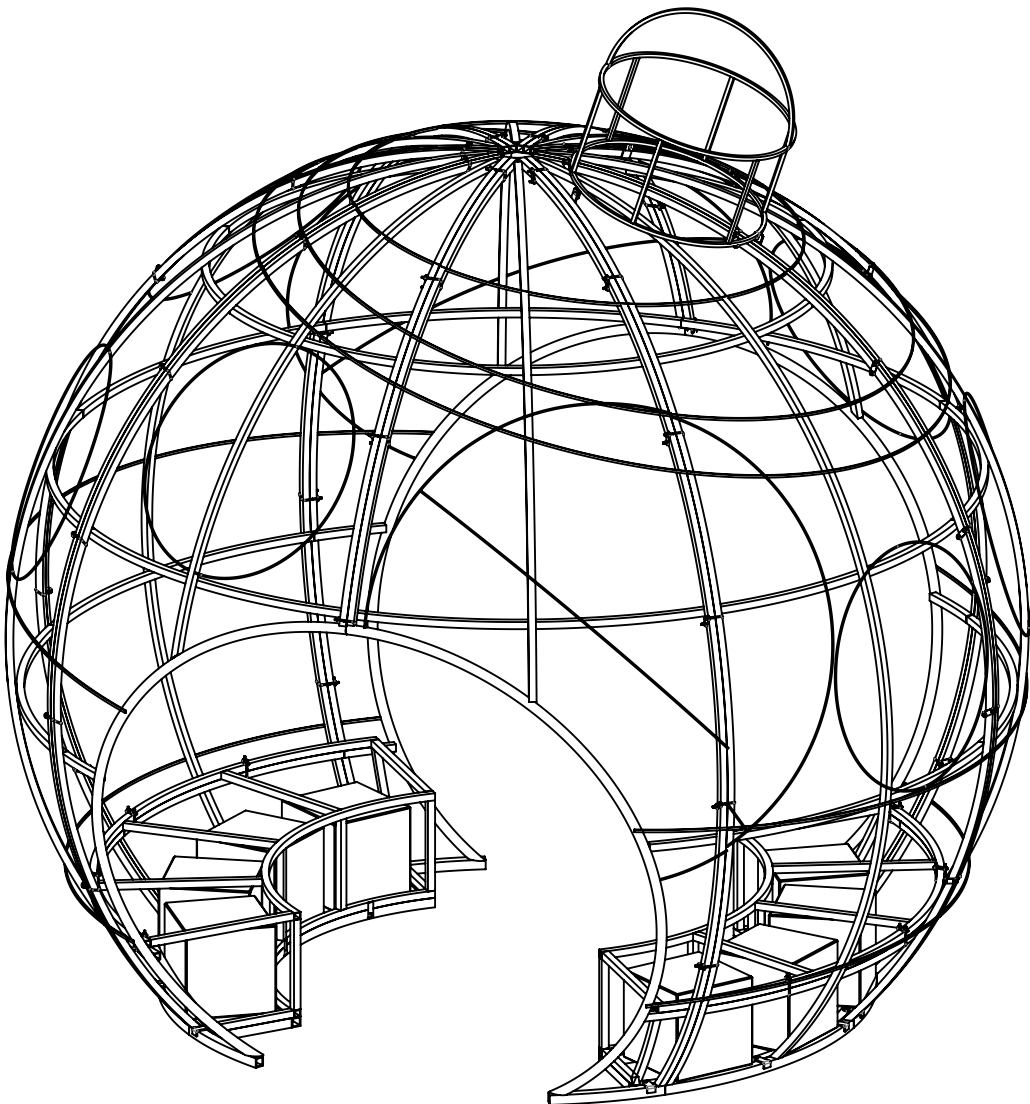


|                                                                                     |            |                      |      |     |
|-------------------------------------------------------------------------------------|------------|----------------------|------|-----|
|  | Elie       |                      |      |     |
|                                                                                     | DS-14-EGWT | Mounting instruction |      |     |
|                                                                                     | M.Boucaud  | 05/05/2022           | 1:30 | 1/7 |

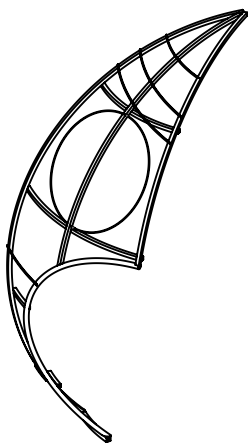


1 x part 1

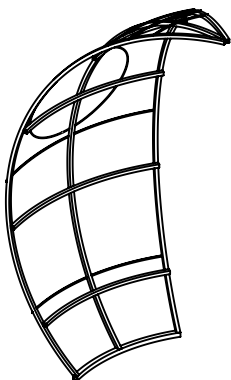


1 x part 2

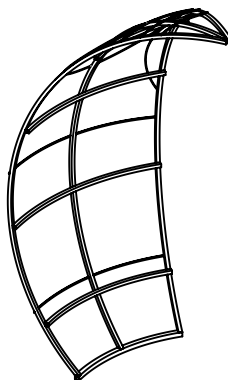


1 x part 3

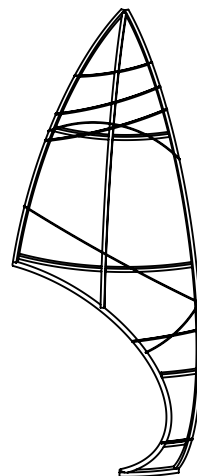


1 x part 4

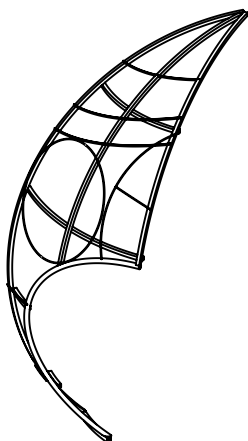


1 x part 5

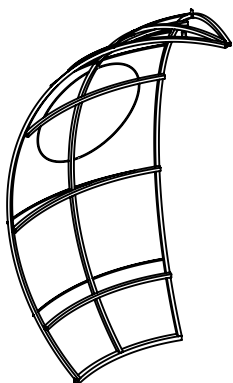


1 x part 6

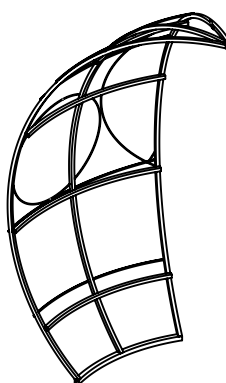


1 x part 7

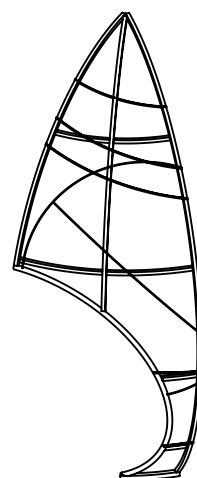

1 x part 8




2 x base 1



2 x base 2



8 x ballasting 100 kg\*  
37 x 37 x 37 cm





flat bottom brackets

\* Ballast is the responsibility  
of the customer.


|                                                                                     |            |                      |      |     |
|-------------------------------------------------------------------------------------|------------|----------------------|------|-----|
|  | Elie       |                      |      |     |
|                                                                                     | DS-14-EGWT | Mounting instruction |      |     |
|                                                                                     | M.Boucaud  | 05/05/2022           | 1:60 | 2/7 |

Step 1: Assemble the parts using the supplied brackets, following the diagram below.

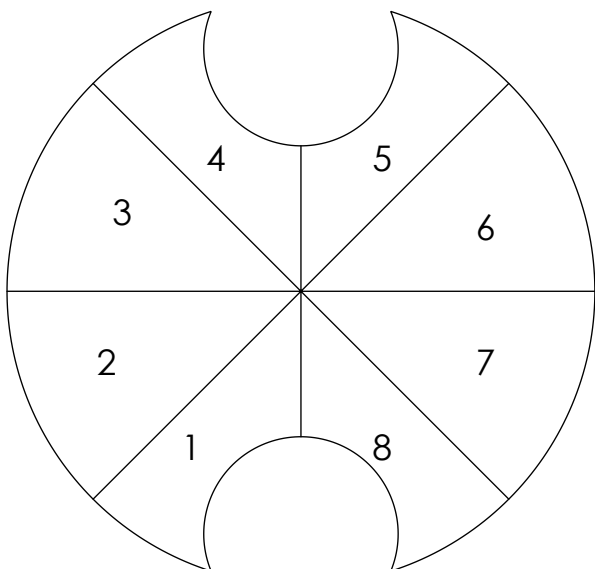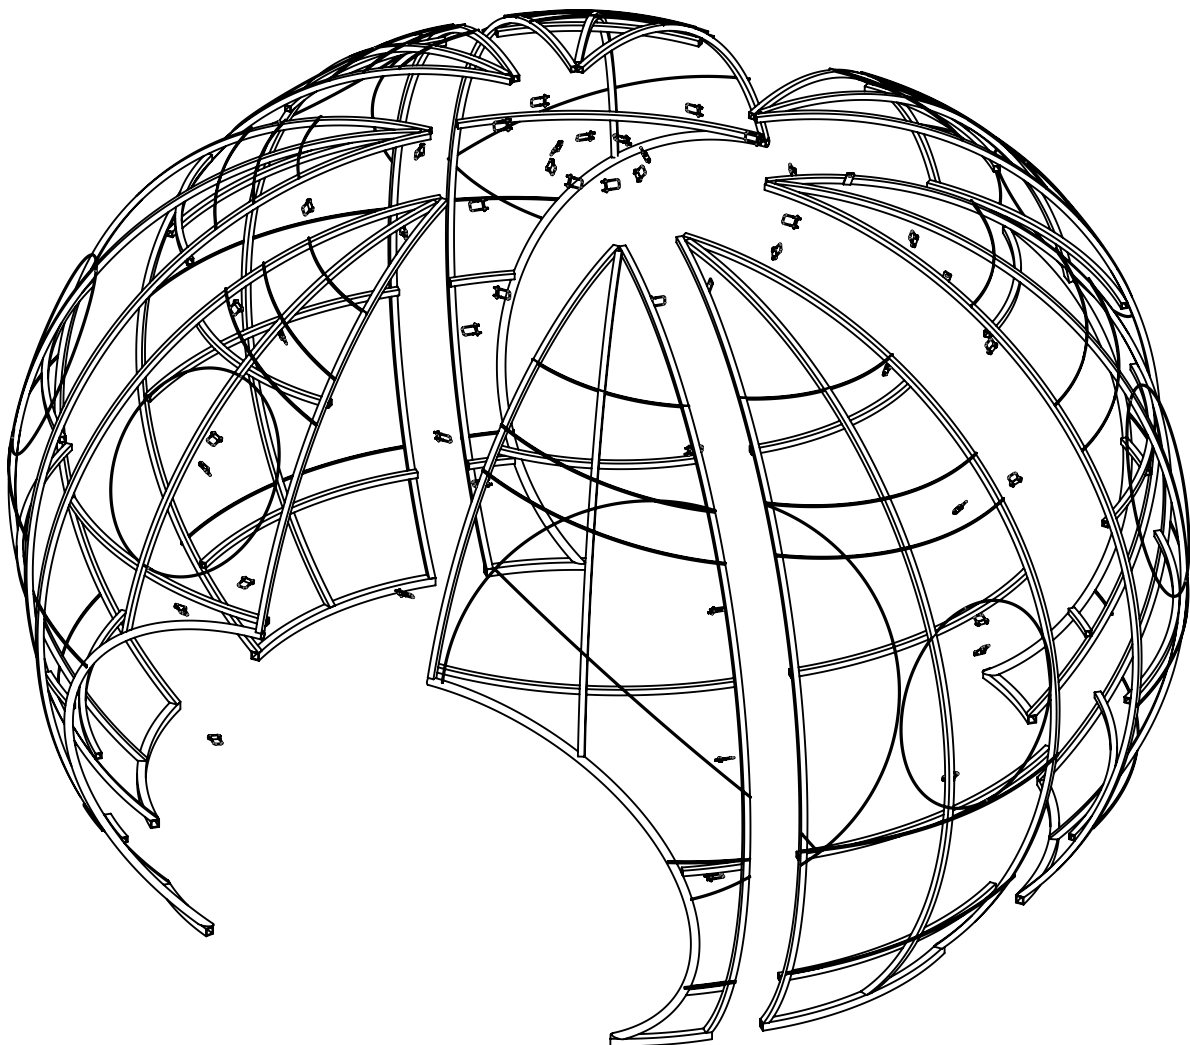


|                                                                                     |            |                      |      |     |
|-------------------------------------------------------------------------------------|------------|----------------------|------|-----|
|  | Elie       |                      |      |     |
|                                                                                     | DS-14-EGWT | Mounting instruction |      |     |
|                                                                                     | M.Boucaud  | 05/05/2022           | 1:35 | 3/7 |

Step 2: Assemble the bases by placing them on the foot of the parts. The hooks must rest on the bars of the parts.

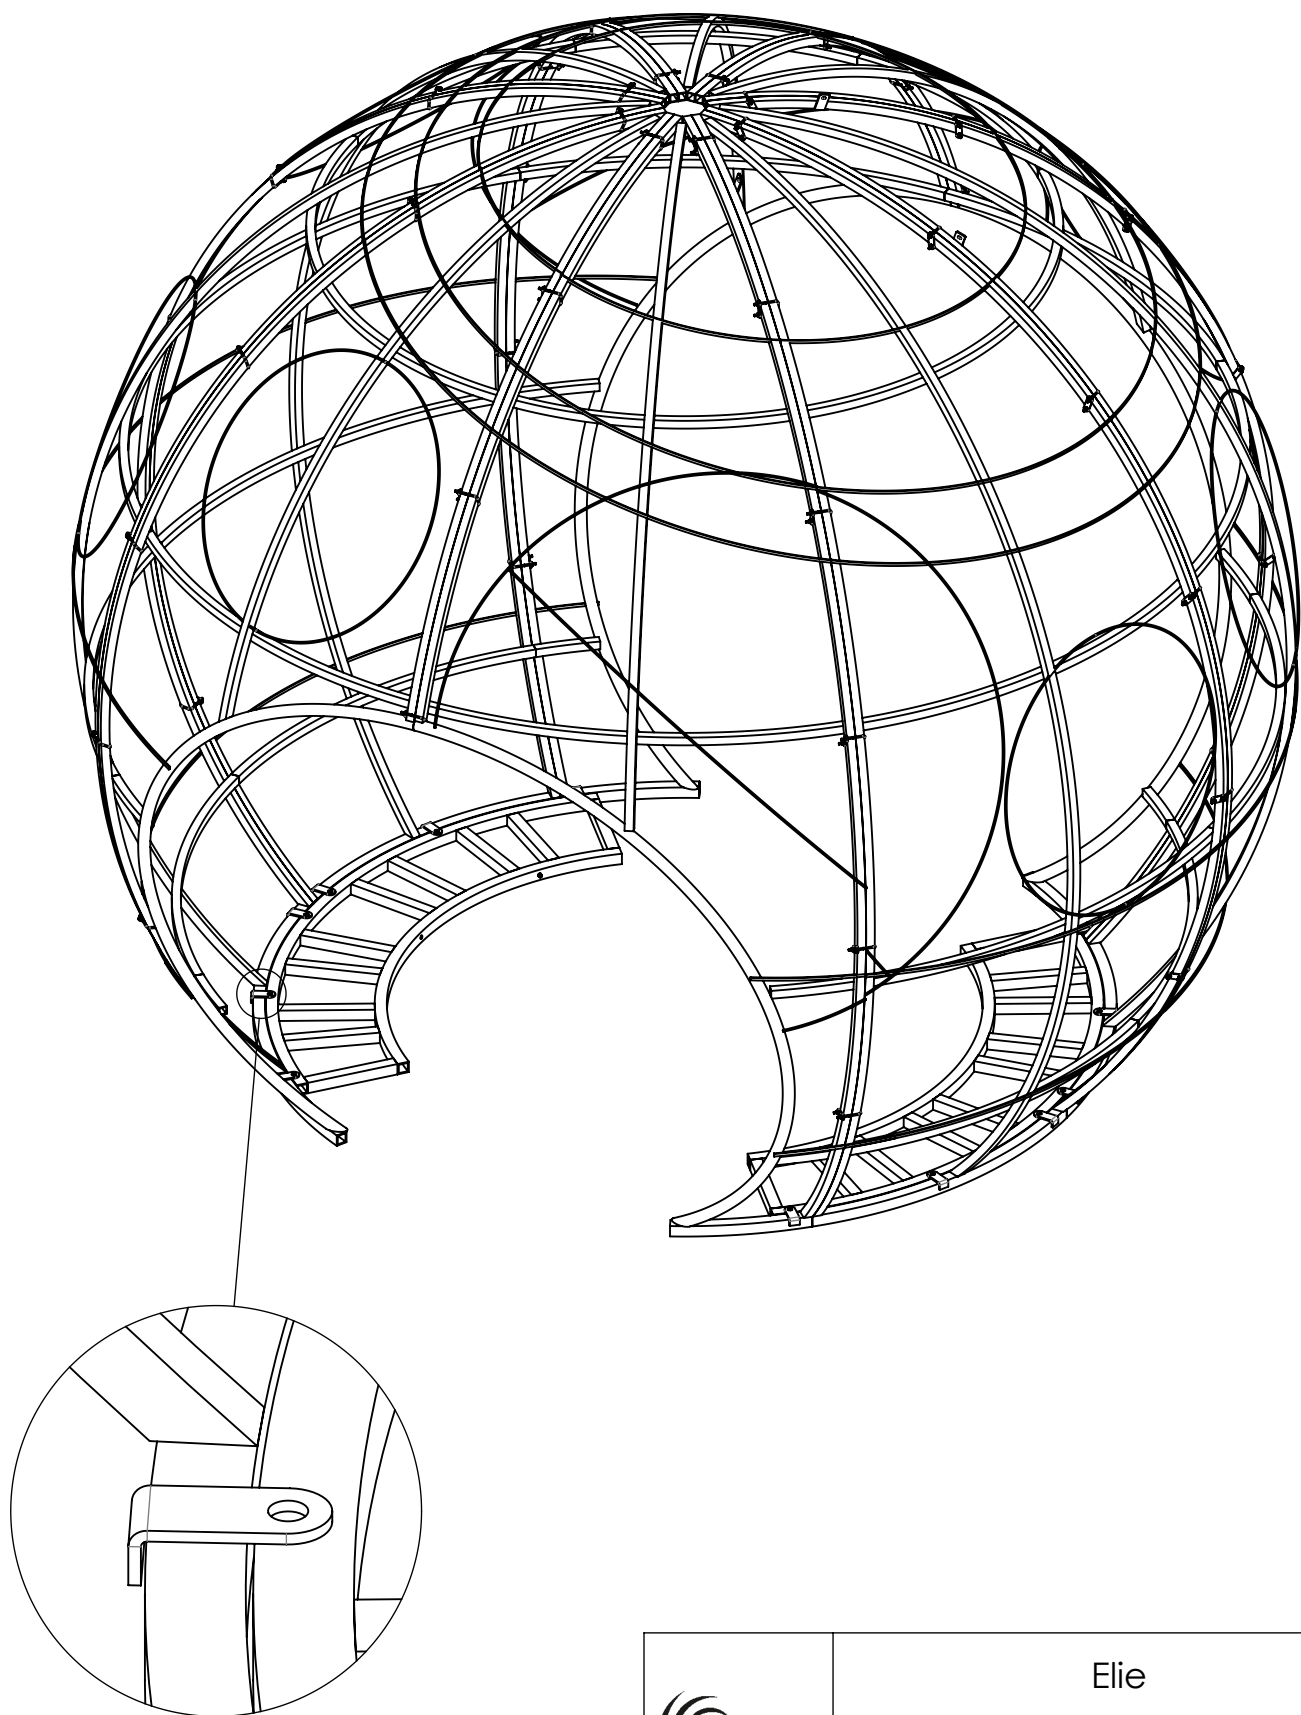

|                                                                                     |            |                      |      |     |
|-------------------------------------------------------------------------------------|------------|----------------------|------|-----|
|  | Elie       |                      |      |     |
|                                                                                     | DS-14-EGWT | Mounting instruction |      |     |
|                                                                                     | M.Boucaud  | 05/05/2022           | 1:25 | 4/7 |

Step 3: Place the ballast on the bases. It is necessary to ballast with 400 kg\* per side (800 kg in total).

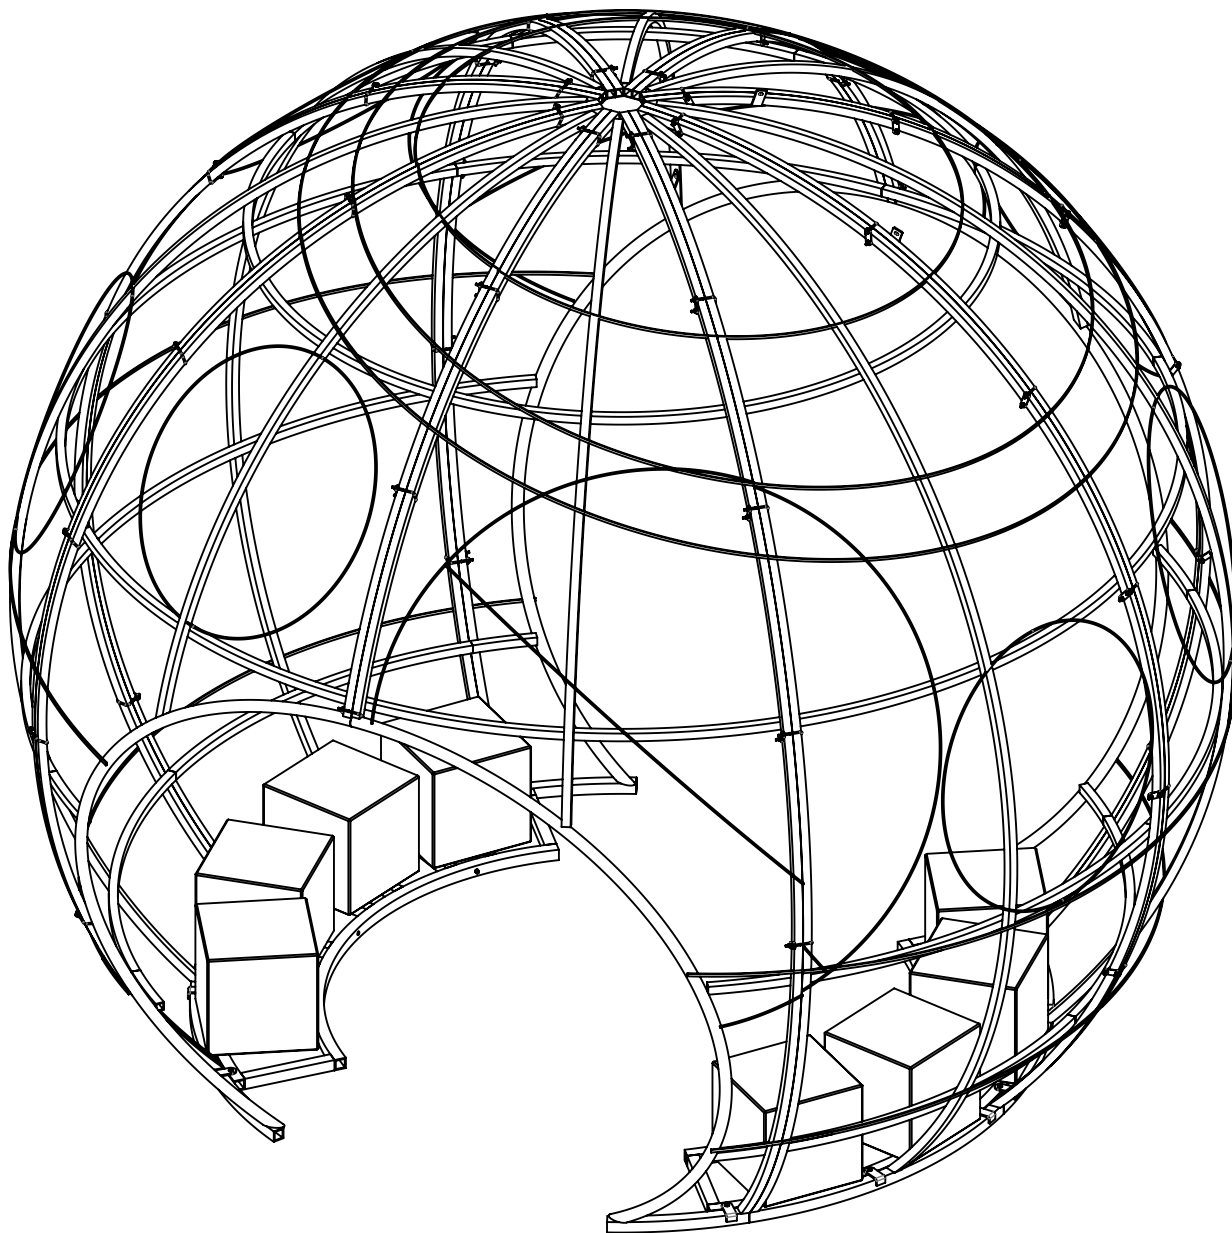


\* Weight for a 3-IIIb wind area (see Eurocode)  
The balasting can vary according to the region.

|                                                                                     |            |                      |      |     |
|-------------------------------------------------------------------------------------|------------|----------------------|------|-----|
|  | Elie       |                      |      |     |
|                                                                                     | DS-14-EGWT | Mounting instruction |      |     |
|                                                                                     | M.Boucaud  | 05/05/2022           | 1:25 | 5/7 |




Step 4: Install the cover of the ballasts with the seats. Bolt at the base and along the ball.

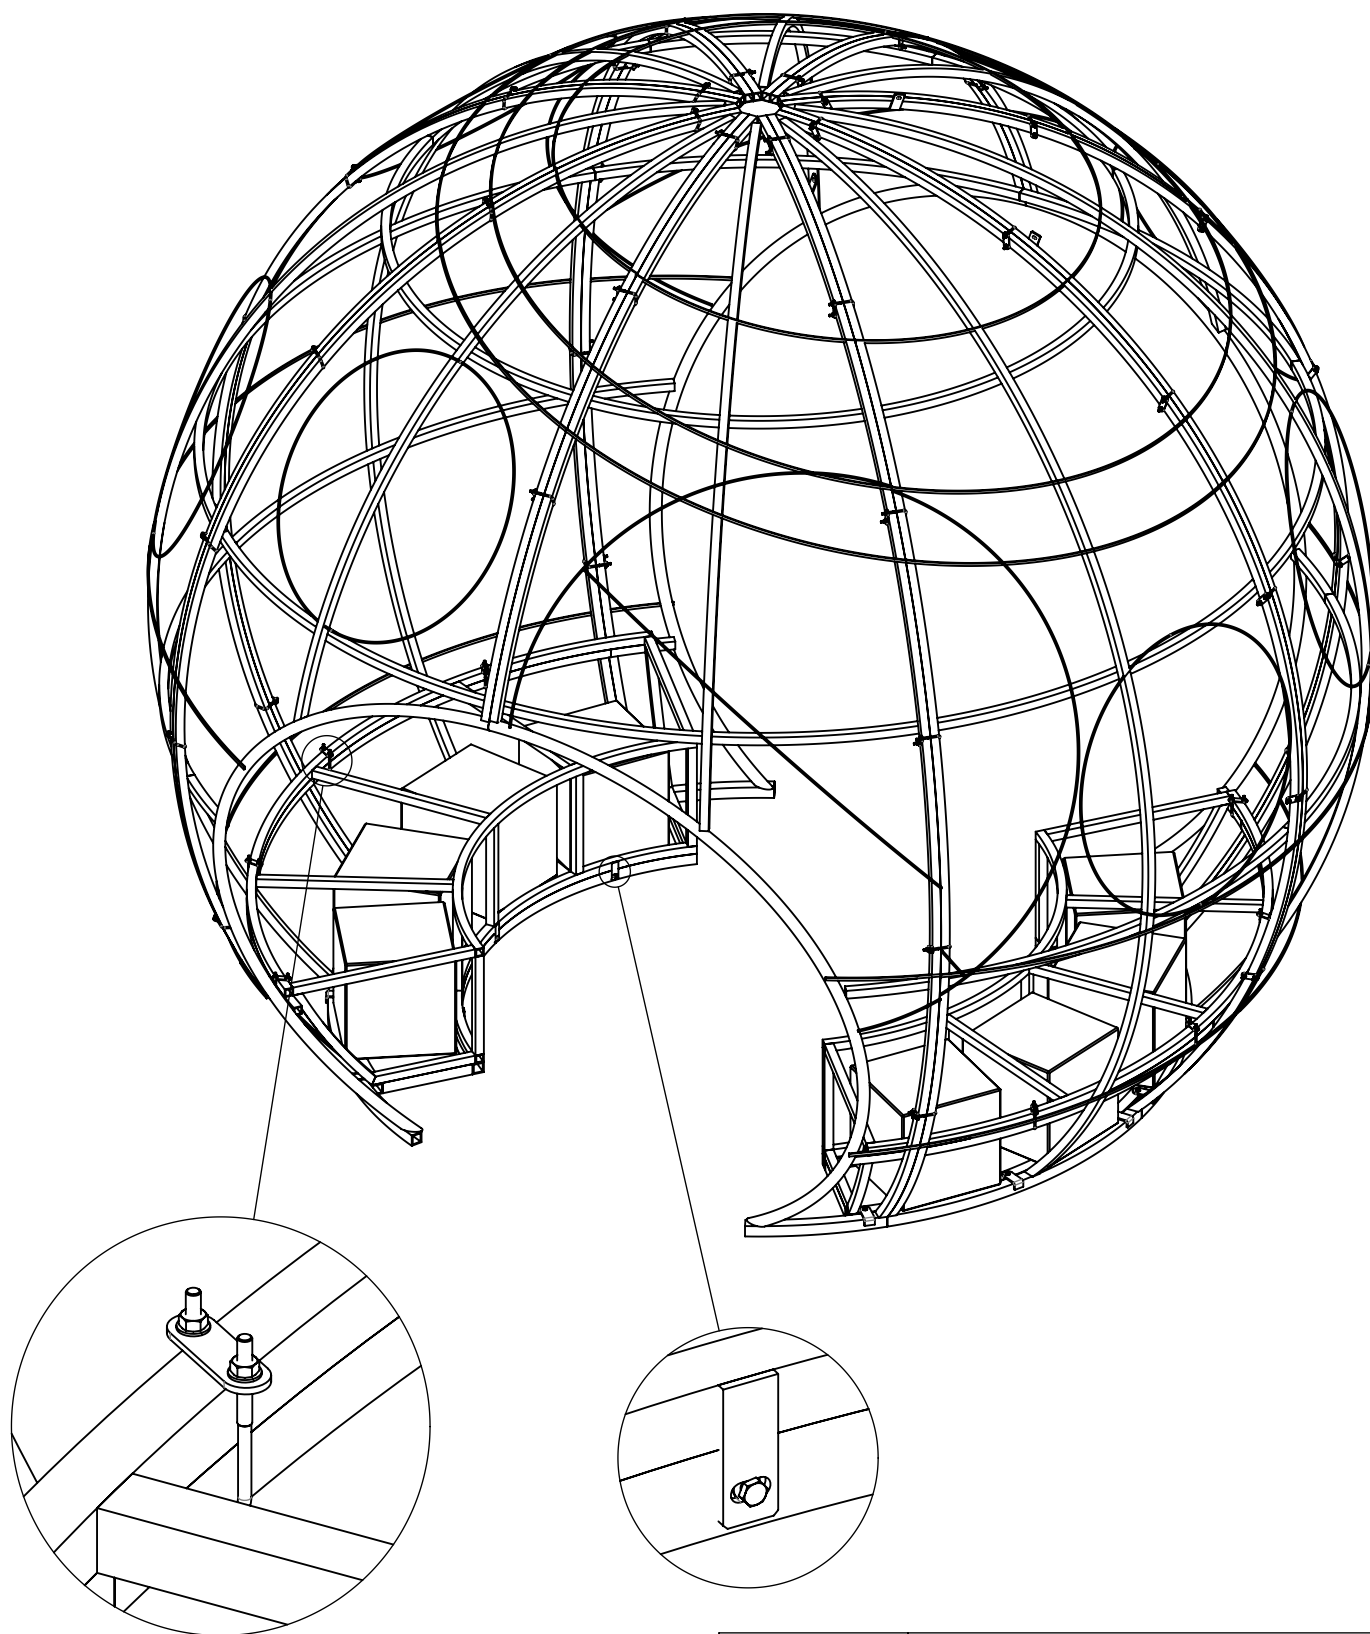

|                                                                                     |            |                      |      |     |
|-------------------------------------------------------------------------------------|------------|----------------------|------|-----|
|  | Elie       |                      |      |     |
|                                                                                     | DS-14-EGWT | Mounting instruction |      |     |
|                                                                                     | M.Boucaud  | 05/05/2022           | 1:25 | 6/7 |

Step 5: Position the cap on the ball, bolt it on the three fixing lugs.

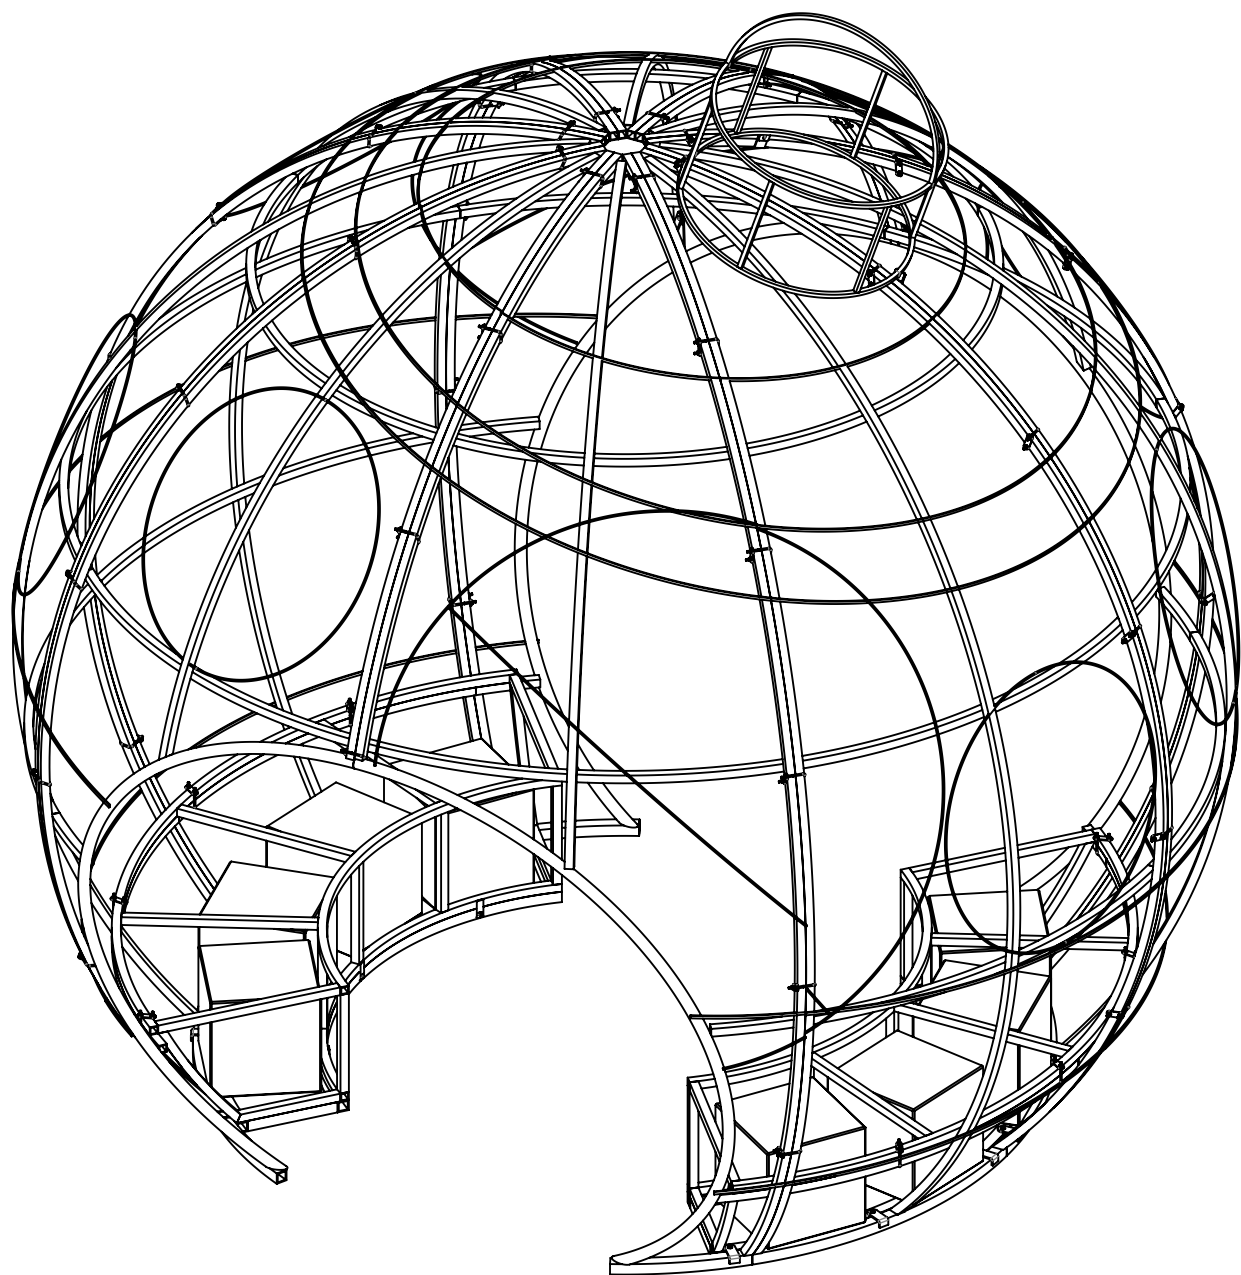

|                                                                                     |            |                      |      |     |
|-------------------------------------------------------------------------------------|------------|----------------------|------|-----|
|  | Elie       |                      |      |     |
|                                                                                     | DS-14-EGWT | Mounting instruction |      |     |
|                                                                                     | M.Boucaud  | 05/05/2022           | 1:25 | 7/7 |